

GP 1751
IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Itzhak, David
Serial No.: 09/656187
Filed: September 6, 2000
Notice of Allow. Date:

Examiner: unknown
Group Art Unit: 1751
Docket: 9124.118US01
Batch No.:

Due Date:

Title:

WATER TREATMENT METHOD AND APPARATUS

CERTIFICATE UNDER 37 CFR 1.8: The undersigned hereby certifies that this Transmittal Letter and the paper, as described herein, are being deposited in the United States Postal Service, as first class mail, with sufficient postage, in an envelope addressed to: BOX OF INITIAL PATENT EXAMINATION, Assistant Commissioner for Patents, Washington, D.C. 20231, on January 31, 2001.

By:

Rebecca Webster

BOX OF INITIAL PATENT EXAMINATION
Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

We are transmitting herewith the attached:

- ☒ Transmittal Sheet in duplicate containing Certificate of Mailing
- ☒ Certified copy of a n ISRAELI application, Serial No. 131848, filed September 9, 1999, the right of priority of which is claimed under 35 U.S.C. 119
- ☒ Other: Submission of Priority Document
- ☒ Return postcard

Please consider this a PETITION FOR EXTENSION OF TIME for a sufficient number of months to enter these papers, if appropriate. Please charge any additional fees or credit overpayment to Deposit Account No. 13-2725. A duplicate of this sheet is enclosed.

MERCHANT & GOULD P.C.
P.O. Box 2903, Minneapolis, MN 55402-0903
612.332.5300

By:

Name: Gregory A. Sebald
Reg. No.: 33,280
GASebald/rw



RECEIVED
FEB - 7 2001
TECHNOLOGY CENTER 1700

S/N 09/656187

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Itzhak

Examiner: unknown


Serial No.: 09/656187

Group Art Unit: 1751

Filed: September 6, 2000

Docket No.: 9124.118US01

Title: WATER TREATMENT METHOD AND APPARATUS



CERTIFICATE UNDER 37 CFR 1.8: The undersigned hereby certifies that this Transmittal Letter and the paper, as described herein, are being deposited in the United States Postal Service, as first class mail, with sufficient postage, in an envelope addressed to: BOX OF INITIAL PATENT EXAMINATION, Assistant Commissioner for Patents, Washington, D.C. 20231, on January 31, 2001.

By:

Rebecca Webster

SUBMISSION OF PRIORITY DOCUMENT(S)

Assistant Commissioner for Patents
Washington, D.C. 20231

Dear Sir:

Applicants enclose herewith one certified copy of an ISRAELI application, Serial No. 131848, filed September 9, 1999, the right of priority of which is claimed under 35 U.S.C. § 119.

Respectfully submitted,

MERCHANT & GOULD P.C.
P. O. Box 2903
Minneapolis, Minnesota 55402-0903
(612) 332-5300

Dated: January 31, 2001

By

Gregory A. Sebald
Reg. No. 33,280

GAS/rw

RECEIVED
FEB -7 2001
TECHNOLOGY CENTER 1700



מדינת ישראל
STATE OF ISRAEL

Ministry of Justice
Patent Office

משרד המשפטים
לשכת הפטנטים

This is to certify that annexed
hereto is a true copy of the
documents as originally
deposited with the patent
application of which
particulars specified on the
first page of annex.

זאת לתעודה כי רצופים
בזה העתקים נכונים של
המסמכים שהופקדו
לכתחילה עם הבקשה
לפטנט לפי הפרטים
הרשומים בעמוד הראשון
של הנספח.

18-12-2000

This _____ היום

מ.ל.ל.

ממונה על המשרד

רשם הפטנטים

Commissioner of Patents

RECEIVED
FEB - 7 2001
TECHNOLOGY CENTER 1700

נתאשר
Certified

לשימוש הלישכה
For Office Use

מספר: Number	131848
תאריך: Date	09-09-1993
הוקדם/נדחה Ante/Post-Dated	

חוק הפטנטים, תשכ"ז-1967
Patent Law, 5727 - 1967
בקשה לפטנט
Application for Patent

אני, (שם המבקש, מענו ולגבי גוף מאוגד - מקום התאגדות)

I, (Name and address of applicant, and in case of body corporate-place of incorporation)

Inventor:

הממציא:
דוד יצחק

ARGAD-EYAL LTD.

ארגד-איל בע"מ
ת.ד. 7
עתלית 30300

David ITZHAK

ששמה הוא

THE LAW

ה י ד ה

an invention the title of which is

בעל ההמצאה מכח

Owner, by virtue of

שיטה ומתקן לטיפול במים

(בעברית)
(Hebrew)

WATER TREATMENT METHOD AND APPARATUS

(:באנגלית)
(English)

מבקש בזאת כי ינתן לי עליה פטנט hereby apply for a patent to be granted to me in respect thereof.

*בקשת חלוקה - Application of Division		*דרישה דין קדימה Priority Claim		
*בקשת פטנט מוסף - Application for Patent Addition				
*מבקשת פטנט from Application	*לבקשה/לפטנט to Patent/Apl.	מספר/סימן Number/Mark	תאריך Date	מדינת האיגוד Convention Country
מס' _____ dated _____	מס' _____ dated _____			
*יפוי כח: כללי / מיוחד - רצוף / בודד - עוד יוגש P.O.A.: general / individual - attached / to be filed later הוגש בענין _____ filed in case _____				
המען למסירת מסמכים בישראל Address for Service in Israel לוצאטו את לוצאטו ת.ד. 5352 באר שבע 84152 מספרנו: 9251/99				
חתימת המבקש Signature of Applicant		היום 9 בחודש _____ בספטמבר שנה 1999 This of the year of		
Luzzatto & Luzzatto By: _____ Attorneys for Applicant		לשימוש הלישכה		

טופס זה כשהוא מוטבע בחותם לישכת הפטנטים ומושלם במספר ובתאריך ההגשה, הינו אישור להגשת הבקשה שפרטיה רשומים לעיל.
This form, impressed with the Seal of the Patent Office and indicating the number and date of filing, certifies the filing of the application the particulars of which are set out above.

* מחק את המיותר Delete whatever is inapplicable

Ref:9251/99

שיטה ומתקן לטיפול במים

WATER TREATMENT METHOD AND APPARATUS

WATER TREATMENT METHOD AND APPARATUS

Field of the Invention

The present invention relates to water treating systems. Particularly, the invention relates to a method and apparatus for the utilization of wastewater.

Background of the Invention

The problem of scale is inherent to all systems in which there is a flow of water that contains any of Ca^{++} and Mg^{++} ions together with any of OH^- , $\text{CO}_3^{=}$, HCO_3^- , $\text{SiO}_3^{=}$, $\text{SO}_4^{=}$ or $\text{PO}_4^{=}$. Under certain temperature and pH conditions, carbonates, silicates, sulfates, phosphate and hydroxide salts precipitate and cause blockage of nozzles, reduction of cross-section area of pipes, heat insulation and underdeposit corrosion. The well-known methods of removing scale from aqueous liquids are reverse osmosis and ion exchange. Another method for removing scale is direct current (DC) electrolysis. US 4,384,943 discloses a method of fluid treatment which comprises applying DC current to aqueous liquids.

Electrolytic treatment of aqueous fluids to produce biocides is well known in the art. For example, US 4,384,943 describes such a treatment which comprises maintaining in the fluid a compound that is electrochemically decomposable to yield bromine, chlorine or iodine and/or by decomposing water to produce biocidally active O_2 or O_3 oxidants.

US 5,424,032 describes a method of treating water using innocuous chemicals for the treatment of microorganisms, or employing ultraviolet light or electrolysis in order to destroy microorganisms.

In a copending patent application by the same applicant hereof, WO 99/16715, the description of which is entirely incorporated herein by reference, there is described a method of treatment of aqueous media, comprising applying to said aqueous medium in an electrolytic cell an electrical direct current of a magnitude and at a flow-rate of the liquid in said electrolytic cell such that a combined effect of scale removing and disinfecting is achieved.

WO 99/16715 further provides an aqueous fluid treatment device for scale removing and disinfecting comprising an electrolytic cell operated by a direct current source, said electrolytic cell being adapted to allow an aqueous medium to circulate therethrough.

The term "disinfecting", as used herein, means destroying various types of microorganisms to the extent that this prevents the formation of biological fouling, and disinfection of drinking water or of water for use in bathing.

Since scale removing and scale preventing are related processes, each of the terms "scale removing" and "scale preventing" herein mean both scale removing and scale preventing.

However, all prior art methods and apparatus suffer from the severe drawback that they require, in order to operate, to utilize substantially non-polluted water, since the addition of impure water leads to operational problems, to high purifying chemicals demand, and to undesirable disposal of waste. Particularly undesired, according to the known art, is the use of water containing organic contaminants. Thus, essentially clean water is wasted, e.g., for operating cooling towers, while waste water from the tower and other industrial or urban sources has to be treated prior to disposal, in an expensive manner.

Cooling towers cannot use water with a high content of organic and biologic materials, since the resulting biofouling, developing as a matter of hours, initially reduces the efficiency of the tower, and eventually may lead to a clogging of the tower's fill.

It has now been surprisingly found, and this is an object of the invention, that it is possible to utilize waste water to operate cooling tower and related equipment, including high organic and biological loads, thereby obtaining the dual result of exploiting less expensive water for operation, and reducing the emission of industrial and urban wastes. For the

purpose of illustrating the invention, it could be mentioned that a cooling tower operating according to invention, which utilizes a make-up of 330 m³ of wastewater every day (e.g., from an industrial plant), reduces the emission of waste to a mere 30 m³ a day, by employing the present invention, the remaining water being evaporated. Thus, instead of treating large volumes of diluted wastewater, only small amounts (less than 10%) of concentrated waste is to be treated. This also results in a lower demand for wastewater treatment volumes.

It is an object of the invention to provide a method for the utilization of wastewater, which overcomes the aforementioned drawback of the prior art.

It is another object of the invention to provide apparatus, particularly cooling tower apparatus that employs impure water.

Other objects of the invention will become apparent as the description proceeds.

Summary of the Invention

In one aspect the invention is directed to a method of operating a cooling tower, comprising feeding to said cooling tower a make-up stream of water containing organic and/or biological contaminants, causing a side stream taken from the recirculating stream to pass through an

electrolytic cell, removing solids precipitating by the action of said cell, and remixing said treated side stream with the main stream, before feeding them to the cooling tower.

According to a preferred embodiment of the invention, the recirculating water is further oxidized by the addition of an oxidizing material. Addition of the oxidant is preferably, but non-limitatively, effected in an amount suitable to maintain the Redox potential at the inlet of the cooling tower in the range of about 300 - 400 mV. Illustrative and non-limitative examples of suitable oxidants include NaClO, TCCA, BCDMH, Br₂ and Cl₂.

According to another preferred embodiment of the invention, a non-oxidizing biocide is added to the recirculating stream as an aid in the prevention of biofouling. Preferably, but non-limitatively, the biocide is added when the Redox potential decreases to a value of about 200 mV or less due to high organic load. Illustrative and non-limitative examples of suitable non-oxidizing biocides include phenolic biocides, quaternary amines, triazolin, DBNPA (dibromonitrilpropionamide), MIT (methyl izothiazolinone) or MBT (Methylene Bis Thiocyanate).

As will be appreciated by the skilled person, the COD of the make-up stream, at high COD values, is typically not less than about 500 and only at peak times reaches over 2,000 ppm. Normally, however, the COD of

the make-up stream is maintained between 500 and 1000 ppm. As will be appreciated by the skilled person, the invention is not limited to CODs of 500 and above, and can of course operate at lower CODs. However, the advantages attained by the invention are even more enhanced when high CODs, or 500 or more are used, which are unheard of in the art of operating cooling towers.

According to a preferred embodiment of the invention, the Redox potential of the stream entering the cooling tower is in the range 300 - 400 mV.

In another aspect the invention is directed to a cooling tower system comprising, in combination with suitable inlets and outlets:

a cooling tower;

a heat-exchanger;

an electrolytic cell; and

at least one filter.

In a further aspect, the invention is directed to a method for concentrating waste water, comprising feeding said waste water to a cooling tower, causing a side stream taken from the recirculating stream to pass through an electrolytic cell, removing solids precipitating by the action of said cell, and remixing said treated side stream with the main stream, before feeding them to the cooling tower.

According to a preferred embodiment of the invention the treated side stream leaving the electrolytic cell is further filtered to remove carried over solids. A preferred filter for this purpose is a sand filter with backwash, but of course other suitable filters will be recognized by the skilled engineer.

All the above and other characteristics and advantages of the invention will be better understood through the following illustrative and non-limitative description of preferred embodiments thereof.

Brief Description of the Drawing

- Fig. 1 schematically shows a cooling tower arrangement according to a preferred embodiment of the invention.

Detailed Description of Preferred Embodiments

The invention will now be illustrated with reference to Fig. 1. Specific operational data will be provided below, for the purpose of illustration, it being understood that any values are given as exemplary values, in order to better illustrate the invention, but the invention is of course not limited to any particular operating conditions. In the figure, numeral 1 indicates the cooling tower, which operates with a make-up feed, MU, which in the example is 15 m³/hr. The MU stream may contain a high content of organic contaminants, such as a stream having a chemical

oxygen demand (COD) of about 500 - 1000 ppm. It should also be noted that the COD may, at peak values, exceed 2000 ppm. When the COD increases, it is desirable to employ non-oxidizing biocides, e.g., chlorinated phenol, to assist in reducing and preventing biofouling. This, as will be apparent to the skilled person, is a concentration by far higher than acceptable according to the prior art. Still, when operating according to the invention, this high concentration does not constitute a problem, and the cooling tower may handle it without any problem.

The cooling tower of the invention operated, according to this specific example, with a recycle ratio $R = 1,200 \text{ m}^3/\text{hr}$. A reservoir 2 contains a solution of hypochlorite (10-12% NaClO , Redox potential = 300 - 400 mV, feed rate up to about 15 lit/hr), and a second reservoir, 3, contains a phenolic or non-oxidizing biocide, e.g., quaternary amines, triazolin, DBNPA (dibromonitrilpropionamide) or MIT (methyl izothiazolinone) which can be added as needed, e.g., when the Redox potential reaches below 200 mV.

It should be noted that the Redox potential range of 300 - 400 mV is not arbitrary, since above 400 mV corrosion problems begin, and below 300 mV the danger of biofouling becomes substantial.

Water is then passed through a heat exchanger 4, which serves one or more users, and is then sent to the cooling tower. A side stream, 5, which

in this specific example is in the range of 100 - 250 m³/hr, is sent to treatment, while the main stream 6 proceeds to the cooling tower. Side stream 5 is fed first to an electrolytic cell 7, operating at 600 A x 10 V, and then to a filter, 8, where precipitates are filtered off. The precipitates are obtained mainly as a result of the electrolytic process in cell 7, which causes scale to precipitate, including salts and organic matter. Electrodeposition of scale on the cathode surface takes place, due to the alkaline environment existing in its vicinity, as well as electro-coagulation and flocculation of dispersed organic and inorganic materials. Of course, the anode causes oxidation and generation of oxychloro compounds, as well as the generation of O₃ and OH⁻ in the water, which are by themselves useful biocides, and these species function as biocides in the system.

A bleed is effected in both the electrolytic cell 7 (blow down stream BD1) and in the filter (blow down stream BD2) 30 m³/day, and the treated water, stream 9, is then mixed with the main stream 6. The Redox potential of the mixed stream 10 should usually be in the range of 300 - 400 mV, but with low CODs lower values, down to 150 mV, can also suffice. Water flowing in the cooling tower is partially evaporated, as schematically indicated by evaporation stream EV. The amount of water evaporated is, in the example given, about 300 m³/day, and must in general be the difference between the make-up stream, MU, and the sum of blow down streams BD1+BD2. "RX" is a Redox potential controller, and

11 is the control circuit for operating the biocides 2 and 3 inlets, e.g., through pumps (not shown).

When operating according to the invention, water in the system is maintained constantly clean, typically having the following parameters: Turbidity < 10 NTU; Total Hardness = 400 - 600 ppm; Ca Hardness = 150 ppm; Total Alkalinity = 200 - 400 ppm; Total Count = 10^3 - 10^5 IFU/ml, with no sulphate reducing bacteria (SRB), without fungi, molds and yeast.

The water used to provide the make-up stream MU can be of any industrial or urban impure source, and may contain organic contaminants, which are considered as unsuitable for cooling tower water, according to the known art. Of course, the MU stream must be treated, prior to use, to remove undesirable matter therefrom, such as solids or biological matter, e.g., bacteria. The desirable parameters do not exceed COD = 20 ppm and total suspended solids (TSS) < 20 ppm.

As explained in WO 99/16715, using the electrolytic cells in the water system, under appropriate conditions, achieves a combined effect of scale removing and disinfecting. According to the present invention, however, additional effects, such as electrocoagulation and electroflocculation are also exploited.

An electrolytic cell for the treatment according to the present invention can be, e.g., a unit which comprises a liquid container having at least one liquid inlet and one liquid outlet, e.g., a pipe, further comprising at least one cathode and one anode placed within said liquid container, said cathode and anode being in electrical contact with the "-" and "+" poles of a direct current source, respectively. Said liquid inlet is connected to stream 5 of Fig. 1, and said liquid outlet is connected to filter 8.

In contrast to the use made in WO 99/16715, in which no chemicals are added, the present invention requires the use of at least hypochlorite. Furthermore, the invention permits to employ water having a conductivity of 3,000 μS or higher, up to about 6,000 μS , without causing any substantial increase in corrosion. A typical pH for operating under these conditions is $\text{pH} \approx 8.5 - 9$. In this specification " μS " indicates the $\mu\text{Siemens}$ unit (which equals $\mu\Omega^{-1}$). It should be noted that current standards, in cooling towers employing chemicals, is not greater than 3,000 μS , and often as low as 2,000 μS .

The present invention can be carried out by means of any electrolytic cell. An example of such a cell is described, e.g., in Whitten et al., "General Chemistry with Qualitative Analysis", Saunders College Publishing, 4th ed., pp. 12-13.

A water treatment device according to the present invention can be in a form such as that described in WO 99/16715, or any other suitable device. An example of operating conditions for the illustrative cooling tower described above is as follows:

- 6 electrolytic cells with a diameter of 50 cm each and 110 cm height.
- Each cell contains 5 anodes and 5 cathodes, of 10 cm x 100 cm each.
- The current (100 - 110 A) x (8 - 10 V).
- 10 sand filters with counter-current flush, 90 cm diameter x 60 cm
- Counter-current flushing effected every 12 hours with 12 - 16 m³ of water.
- Heat Output: 1,200 m³/hr x 7°C. Operating 4 - 5°C above the wet temperature.

$$T_{in} = 35^{\circ}\text{C}; \quad T_{out} = 28^{\circ}\text{C}; \quad T_{bulk} = 24^{\circ}\text{C}.$$

The above description and examples have been provided for illustrative purposes only, and are not intended to limit the invention in any way. It will be apparent to the skilled person that many modifications, variations and adaptations may be made to the invention by persons skilled in the art, without departing from the spirit of the invention or exceeding the scope of the claims.

CLAIMS:

1. A method of operating a cooling tower, comprising feeding to said cooling tower a make-up stream of water containing organic and/or biological contaminants, causing a side stream taken from the recirculating stream to pass through an electrolytic cell, removing solids precipitating by the action of said cell, and remixing said treated side stream with the main stream, before feeding them to the cooling tower.
2. A method according to claim 1, further comprising oxidizing the recirculating water by the addition of an oxidizing material.
3. A method according to claim 2, wherein the oxidant is added in an amount suitable to maintain the Redox potential at the inlet of the cooling tower in the range of about 300 - 400 mV.
4. A method according to claim 2 or 3, wherein the oxidant is selected from among NaClO, TCCA, BCDMH, Br₂ and Cl₂.
5. A method according to any one of claims 1 to 4, further comprising adding a non-oxidizing biocide to the recirculating stream as an aid in the prevention of biofouling.

6. A method according to claim 5, wherein the biocide is added when the Redox potential decreases to a value of about 200 mV or less.
7. A method according to claim 5 or 6, wherein the biocide is selected from among phenolic biocides, quaternary amines, triazolin, DBNPA (dibromonitrilpropionamide), MIT (methyl izothiazolinone) or MBT.
8. A method according to any one of claims 1 to 7, wherein the COD of the make-up stream is between about 500 and over 2,000 ppm.
9. A method according to claim 8, wherein the COD of the make-up stream is between 500 and 1000 ppm.
10. A method according to any one of claims 1 to 9, wherein the Redox potential of the stream entering the cooling tower is in the range 300 - 400 mV.
11. Cooling tower system comprising, in combination with suitable inlets and outlets:
 - a cooling tower;
 - a heat-exchanger;
 - an electrolytic cell; and
 - at least one filter.

12. A method for concentrating waste water, comprising feeding said waste water to a cooling tower, causing a side stream taken from the recirculating stream to pass through an electrolytic cell, removing solids precipitating by the action of said cell, and remixing said treated side stream with the main stream, before feeding them to the cooling tower.
13. A method according to claim 12, wherein the treated side stream leaving the electrolytic cell is further filtered to remove carried over solids.
14. A method according to claim 13, wherein the filter is a sand filter, with backwash.
15. A method of operating a cooling tower, essentially as described and illustrated.
16. A method for concentrating wastewater, essentially as described and illustrated.

לוצאטו את לוצאטו
LUZZATTO & LUZZATTO

By

ע"י



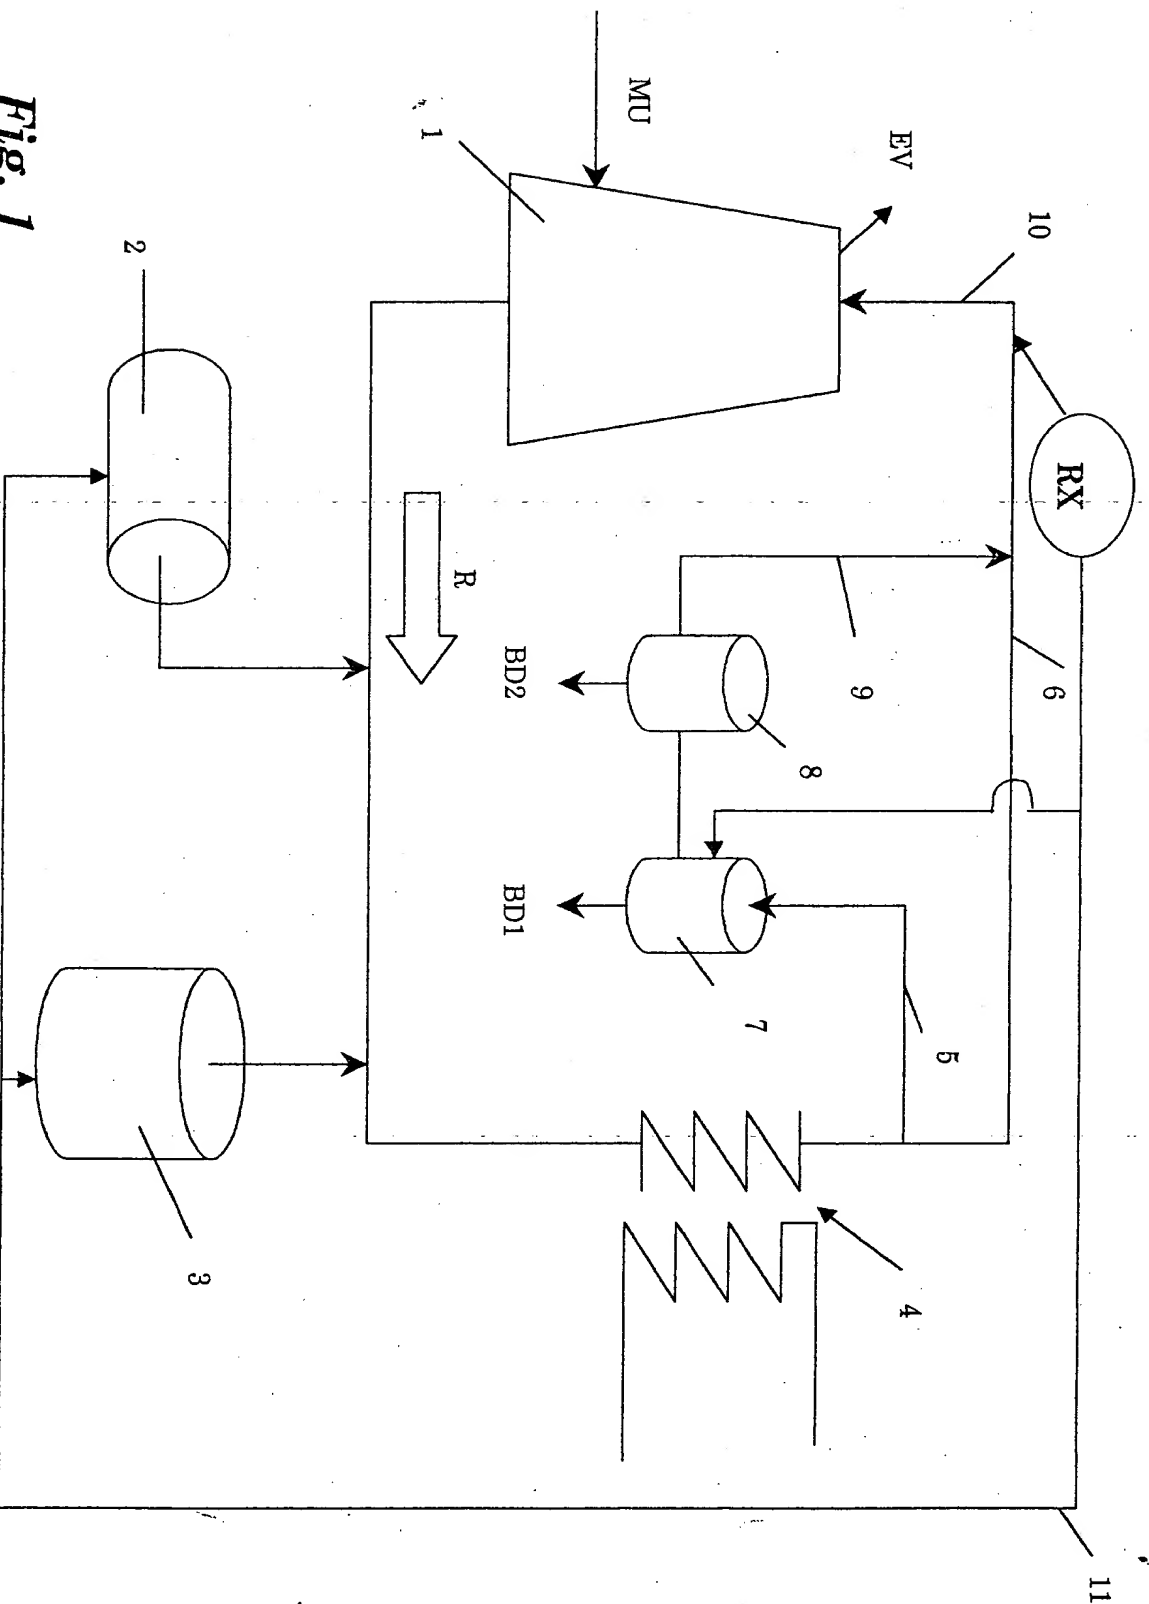


Fig. 1